

SEFELEC MGR10

Programmable Microhmmeter

Thanks to its very good accuracy and its rugged construction, this microhmmeter can be used in laboratories as well as in industry. Its main applications are measurements on : transformers, chokes, electrical motors, cables, switches, circuit breakers, relays, fuses surface, contact ground or earth and connection resistances.

“ Manual or automatic temperature compensation can be done according to copper or aluminium, but also any other kind of metal”

TECHNICAL CHARACTERISTICS

- Measuring from 0.1 $\mu\Omega$ to 30 k Ω
- Measuring current up to 10 Amp
- Accuracy < 0.03 %
- Manual / Automatic range
- Memory of 4000 readings
- Battery (MGR10A) and mains supply (MGR10) versions
- RS232C, PLC or IEEE488-2 interfaces

LOW RESISTANCE MEASUREMENT

Resistance

- 8 Measurement ranges :
3 m Ω , 30 m Ω , 200 m Ω , 3 Ω , 30 Ω ,
300 Ω , 3 k Ω , 30 k Ω
- Resistance measurement :
From 0.1 $\mu\Omega$ to 30 k Ω
- Accuracy: \pm 0.03 % reading +
0.1 % full scale
- Auto or manual range selection
with current adjustable by range

Current and voltage

- Measurement current : From 1 μ A to
10 A according to range and manually
adjustable in %
- Accuracy : \pm 0.1 % (pulsed in battery
mode, pulsed or DC with mains
charger)
- Current direction : Manual or
continued with the selection of the
current +VE, -VE, or +VE and -VE with
the average calculated

This latter option removes thermal EMF errors from the measurements

- Voltage in open circuit : 20 mV and
50 mV with protection against the
inductive charges and the over voltage
(415 V)

Compensation

- Temperature measurement : From 0 to
100° C
Displayed in deg C, F, K
Compensation according to the resistance
materials (copper, aluminium...)
- Length of cable : Values can be displayed
in Ω , Ω /Km or Km

Signals

- Measurement threshold adjustable with
low and high limits
- Visual (red/green leds) and audible
signals for results

Data logging

- 4000 measurement memories with
measurement results date and time

Connection

- 4 banana plugs 4 mm on the front panel
- RS232 interface between PC and MGR10
connection

Display

- 240x64 LCD matrix display with backlight
- LCD numerical screen with 30.000 digits
resolution

Battery (MGR10A only)

- Operating time : 11 hours or 6000
measurements at 10 A

GENERAL CHARACTERISTICS

MGR10 presentation

- Bench style metal case

Dimensions

- Height : 131 mm
- Width : 344 mm
- Depth : 332 mm

Weight

- 9.8 kg mains type
- 12 kg battery type (MGR10A)

Power

- 115/230 V, 50/60 Hz

Operating temperature

- 0° C to + 45° C
Rel. humidity up to 80 % none condensing

Storage temperature

- -10° C to + 60° C

Pollution Degree

- Pollution 2 : conducting pollution caused
by condensation

Overload category

- CAT II

Safety Class

- Connected to the ground by power cord

International standards

- MGR10-B Complies with NFC 93050



SEFELEC MGR10

Programmable Microhmmeter

MGR10 & MGR10A

Resistance		Current (Precision: $\pm 0.1\%$)			Measurement accuracy
Range	Resolution	Max Current	Min Current	Resolution	
30 k Ω	1 Ω	100 μA	10 μA	1 μA	0.03% Rdg + 0.02% FS
3 k Ω	100 m Ω	1 mA	100 μA	10 μA	0.03% Rdg + 0.01% FS
300 Ω	10 m Ω	10 mA	1mA	100 μA	0.03% Rdg + 0.01% FS
30 Ω	1 m Ω	100 mA	10mA	1 mA	0.03% Rdg + 0.01% FS
3 Ω	100 $\mu\Omega$	1 A	100mA	10 mA	0.03% Rdg + 0.01% FS
200 m Ω	10 $\mu\Omega$	10 A	1A	100 mA	0.03% Rdg + 0.01% FS
30 m Ω	1 $\mu\Omega$	10 A	1A	100 mA	0.03% Rdg + 0.01% FS
3 m Ω	0,1 $\mu\Omega$	10 A	1A	100 mA	0.03% Rdg + 0.02% FS

MGR10B

Resistance		Current (Precision: $\pm 0.1\%$)			Measurement accuracy
Range	Resolution	Max Current	Min Current	Resolution	
30 k Ω	1 Ω	100 μA	10 μA	1 μA	0.03% Rdg + 0.02% FS
3 k Ω	100 m Ω	1 mA	100 μA	10 μA	0.03% Rdg + 0.01% FS
300 Ω	10 m Ω	10 mA	1mA	100 μA	0.03% Rdg + 0.01% FS
30 Ω	1 m Ω	100 mA	10mA	1 mA	0.03% Rdg + 0.01% FS
3 Ω	100 $\mu\Omega$	100 mA	10mA	1 mA	0.05% Rdg + 0.01% FS
200 m Ω	10 $\mu\Omega$	100 mA	10mA	1 mA	0.05% Rdg + 0.01% FS

MGR10C

Resistance		Current (Precision: $\pm 0.1\%$)			Measurement accuracy
Range	Resolution	Max Current	Min Current	Resolution	
30 k Ω	1 Ω	10 μA	10 μA	NA	0.05% Rdg + 0.02% FS
3 k Ω	100 m Ω	100 μA	100 μA	NA	0.05% Rdg + 0.01% FS
300 Ω	10 m Ω	1mA	1mA	NA	0.05% Rdg + 0.01% FS
30 Ω	1 m Ω	10 mA	10 mA	NA	0.05% Rdg + 0.01% FS
3 Ω	100 $\mu\Omega$	10 mA	10 mA	NA	0.05% Rdg + 0.01% FS

SEFELEC MGR10

Programmable Microhmmeter

Versions

MGR10A

- Battery and mains supply version

MGR10B

- This version is especially dedicated for measuring contact resistance according to the NFC 93050 standard

MGR10C

- This version is especially dedicated for pyrotechnic environment

OPTIONS

MGR10-04

- PT100 temperature probe

MGR10-05

- Rear panel output deconnectable
- through a six points connector
- female connector is provided, output cables are provided and built by the user

MGR10-09

- Possibility to display the resistance in ohm / km

SYWINPASS-MX

- Winpass MX software, works with Ethernet, RS232 or GPIB interface
- only works under Windows™ XP PRO SP3 and Windows™ 7 32/64 bits

Interface

MGR10-01

- RS232C interface (talker-listener); provided with RS232 cable

MGR10-02

- PLC Interface
- Cycle start contact
- GOOD and BAD contacts
- END CYCLE contact
- WORKING ERROR contact

MGR10-06


- IEEE488-2 (talker-listener)

MK series

1 meter cable & wire measuring device (clamping device) - 2 CO183 can be used to connect MK to MGR10


MK1

- 1 meter linear measurement guide to measure cable sections from 0,1 mm² up to 100 mm²



MK2

- 1 meter linear measurement guide to measure cable sections from 1 mm² up to 1000 mm²

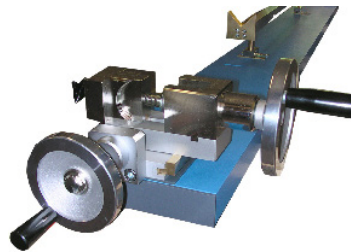


MK2 - SB

- 1 meter linear measurement guide to measure cable sections from 1 mm² up to 2500 mm²

MK4

- 1 meter linear measurement guide to measure cable with section from 1 mm² up to 1000 mm², with water tank and water pump



AVAILABLE ACCESSORIES

Kelvin Tips

TE81

- Length : 1.80, 5 and 10 meters
- Starting : 2 pins male plug
- Ending : cable ending with a probe with a remote control button and green/red leds
- Type : 2 wires lead (this has to be ordered with an other 2 wires lead accessory)
- Most common application : especially made for a manual use to test several points



CO184

- Length : 1.80 meters
- Starting : 2 pins male plug
- Ending : retractable tip probe
- Type : 2 wires lead (this has to be ordered with an other 2 wires lead accessory)
- Most common application : especially made for a manual use to test the ground point (for multi point ground continuity, TE81 is better adapted), the retractable tip probe will make a contact with the 2 pins when pushed by the operator hand



CO226

- Length : 1.80 meters
- Starting : 2 pins male plug
- Ending : big crocodile clip (max opening dimension 41mm)
- Type : 4 wires lead
- Most common application : especially made to crimp on big cable sections




SEFELEC MGR10

Programmable Microhmmeter

CO64

- Length : 1 and 5 meters
- Starting : 2 pins male plug
- Ending : small sized Kelvin clip
- Type : 4 wires lead
- Most common application : especially made to crimp on small connection points



Kelvin Clips

CO183

- Length : 1.80, 5 or 10 meters
- Starting : 2 pins male plug
- Ending : cable ending with small crocodile clip (the green banana goes into the grey banana, and this goes to the crocodile clip)
- Type : 2 wires lead (this has to be ordered with an other 2 wires lead accessory)
- Most common application : especially made for the return lead (this can be connected to a test box: in the case you test equipment with a mains socket) on the other side, a test probe can be connected (for multi point continuity for instance)...



CO197

- Length : 10 meters
- Starting : 2 pins male plug
- Ending : big crocodile Kelvin clip (max opening dimension 30mm)
- Type : 2 wires lead (this has to be ordered with an other 2 wires lead accessory)
- Most common application especially made to crimp on big cable sections




TC001-00-L02

- Remote control foot switch : 2.5 meters, requires MGR10-02



A014

- Interconnection 25 pin box to use simultaneously accessories



CO160

- Red-Green lamp

KT-002-00

- 19 inch rack mounting adaptation

CALIBRATION

MG91-OHM

- calibration kit for the MGR10



KW

- Low value standard resistors, from 1 mΩ to 10 kΩ



Eaton
Sefelec sas
19 rue des Campanules
F-77185 Lognes
France

Head Office +33 (0)1 64 11 83 42
Fax +33 (0)1 60 17 35 01
South-east contact +33 (0)4 74 60 79 78
South-west contact +33 (0)5 56 80 53 22

After-sales service +33 (0)1 64 11 83 48
Fax +33 (0)1 60 17 85 64

© 2016 Eaton - Sefelec sas
All Rights Reserved
Printed in France



Powering Business Worldwide

Eaton is a registered trademark.

All other registered trademarks are commercial trademarks of their respective owners.